




Load Meter

Blue Arrow CLY-AL Dynamometer

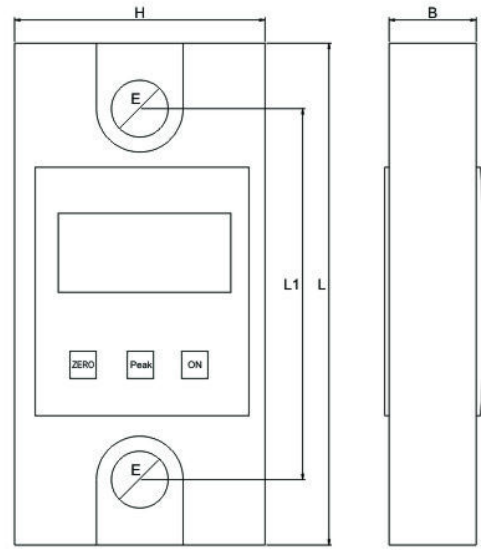

unit:mm

kN
lb/kg Applicable in Built-in
selectable day and night beeper



Features

- Aerial aluminum alloy housing, light weight, anti-dust and antimagnetic
- 6 digit 18mm wide angle LCD display with backlighting
- 4×AA Alkaline batteries or nickel hydrogen rechargeable batteries
- Superior high precision, preferable to weigh the force or the gravity
- In weighing model performed like a crane scale, the dynamometer has the functions of tare, display the gross weight and net weight
- The dynamometer has the functions of overload alarm, power consumption indication
- Conform to CE standard

Technical Specifications

Accuracy: 0.1%F.S.
 Time to Stable Reading: ≤8s
 Maximum Safe Load: 150%F.S.
 Ultimate Overload: 500%F.S.
 Overload Alarm: 100%F.S.+9e
 Operating Temperature: -10°C ~ 40°C
 Storage Temperature: -20°C ~ 60°C

Max Capacity	Division	Weight	L	H	B	E	L1
1000kg	0.5kg	2kg	230	115	40	26	178
2000kg	1kg	2kg	230	115	40	26	178
3000kg	1kg	2kg	230	115	40	26	178
5000kg	2kg	2kg	230	115	40	26	178

Distributor (US and Canada)
Optoco Inc.
 600 - 2498 West 41st Ave
 Vancouver, BC, V6M 2A7
 Tel: 778-706-6933
 Email: info@optoco.ca
 Web: www.crane-scale.com

Specifications are subject to change without notice.