





Load Meter

Blue Arrow CLY-ALP Dynamometer with Handheld Display



Wireless PII indicator

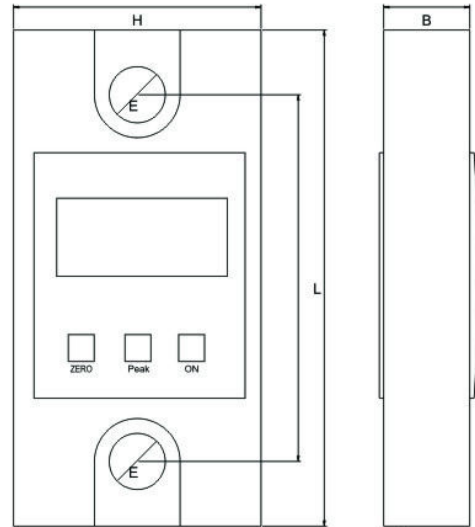

unit :mm



Features

- The wireless dynamometer is composed by the unique loadcell and wireless palm indicator
- With the load cell not over 2kg and portable palm indicator, the dynamometer can be used in outdoors
- Over 250 feet transmit distance, it protects you from unsafe or polluted environment
- With superior high precision, low power consumption and wireless transmission, this product has vast weighing application
- Easy installation with the bolt and the overload protection make you use it comfortable
- Built-in lithium battery, available for quick charge with 7.2V charger, can support 24 hours of continuous working after fully charged

Technical Specifications

Accuracy: 0.1%F.S.
 Time to Stable Reading: ≤8s
 Maximum Safe Load: 150%F.S.
 Ultimate Overload: 500%F.S.
 Overload Alarm: 100%F.S.+9e
 Operating Temperature: -10℃ ~ 40℃
 Storage Temperature: -20℃ ~ 60℃

Max Capacity	Division	Weight	L	H	B	E
1000kg	0.5kg	2kg	230	115	40	26
2000kg	1kg	2kg	230	115	40	26
3000kg	1kg	2kg	230	115	40	26
5000kg	2kg	2kg	230	115	40	26

Distributor (US and Canada)
Optoco Inc.
 600 - 2498 West 41st Ave
 Vancouver, BC, V6M 2A7
 Tel: 778-706-6933
 Email: info@optoco.ca
 Web: www.crane-scale.com

Specifications are subject to change without notice.