




Digital Crane Scale

Blue Arrow XZ-GGC-Plus Crane Scale



Remote Control

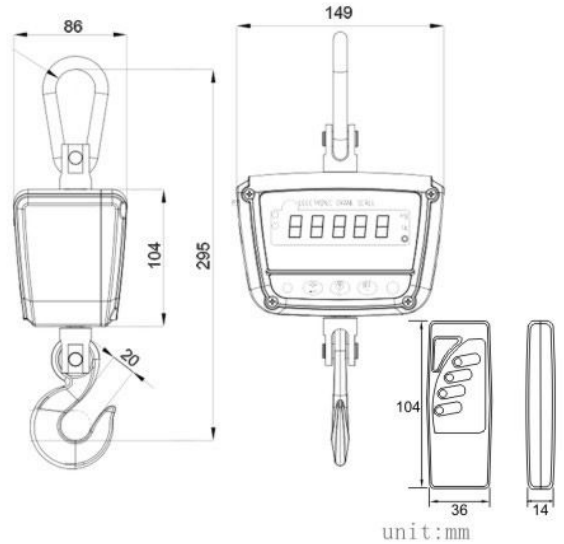

kN
 lb kg

Lb/kg/kN Applicable in Built-in
 selectable day and night beeper


Features

- Aluminum diecasting alloy housing with high strength and pleasant appearance
- 360° safe rotated hook and shackle
- IP65 industrial grade to protect from extremely environment
- Built-in long-life environmental lithium-iron battery
- High definition FSTN display, 5 1/2-digit 25mm LCD display with backlighting
- Exclusive patent load cell, better than 1/3000 division

Technical Specifications

Executive Standard: GB/T 11883-2002
 Accuracy: OIML R76
 Time to Stable Reading: ≤8s
 Maximum Safe Load: 150%F.S.
 Ultimate Overload: 500%F.S.
 Overload Alarm: 100%F.S.+9e
 Operating Temperature: -10°C ~ 40°C
 Storage Temperature: -20°C ~ 60°C

LCD Display

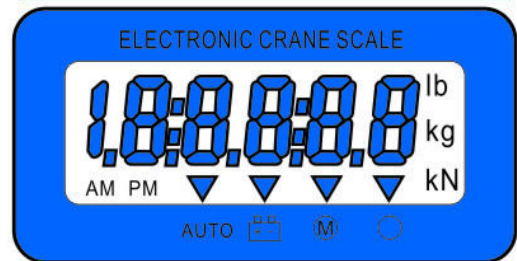

Max Capacity	Division	Weight
30kg	0.01/0.005kg	1.5kg
50kg	0.02/0.01kg	1.5kg
100kg	0.05/0.02kg	1.5kg
150kg	0.05/0.02kg	1.5kg
200kg	0.1/0.05kg	1.5kg
300kg	0.1/0.05kg	1.5kg

Distributor (US and Canada)
Optoco Inc.
 600 - 2498 West 41st Ave
 Vancouver, BC, V6M 2A7
 Tel: 778-706-6933
 Email: info@optoco.ca
 Web: www.crane-scale.com

Specifications are subject to change without notice.