




Digital Crane Scale

Blue Arrow XZ-GGE-Pro Crane Scale

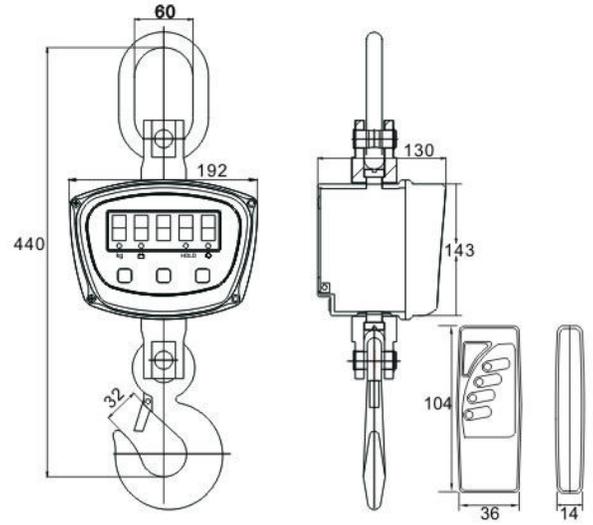

unit:mm

kN
lb kg
Lb/kg/kN
selectable

Built-in
beeper


CE

6V/3.2Ah
battery

Features

- Microdiecasting aluminum-magnesium alloy housing light weight, anti-dust and anti-magnetic
- 360°swivel shackle & hook
- Quick-install battery design makes it easy to replace the battery
- Super bright 5 digit red LED display with 25 mm letter height
- Divisions and unit conversion switch

LED Display

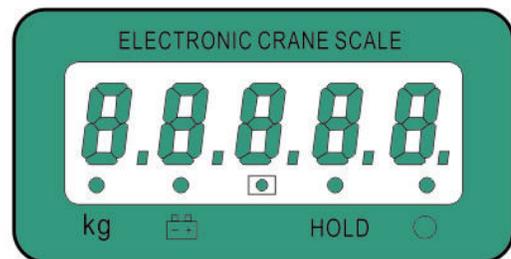

Technical Specifications

Executive Standard: GB/T 11883-2002
 Accuracy: OIML R76
 Time to Stable Reading: $\leq 8s$
 Maximum Safe Load: 150%F.S.
 Ultimate Overload: 500%F.S.
 Overload Alarm: 100%F.S.+9e
 Operating Temperature: $-10^{\circ}\text{C} \sim 40^{\circ}\text{C}$
 Storage Temperature: $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$

Max Capacity	Division	Weight
500kg	0.2/0.1kg	5kg
1000kg	0.5/0.2kg	5kg
1500kg	0.5/0.2kg	5kg
2000kg	1.0/0.5kg	5kg

Distributor (US and Canada)
Optoco Inc.
 600 - 2498 West 41st Ave
 Vancouver, BC, V6M 2A7
 Tel: 778-706-6933
 Email: info@optoco.ca
 Web: www.crane-scale.com

Specifications are subject to change without notice.